



CBHG



DOOR GRILLE | VENTILATION

LOUVRE FREE AIR: 64% MINIMUM AT 83 HIGH

PRODUCT DESCRIPTION

The CBHG door grilles are comprised of extruded bars supported on rods. This allows for greater air movement than traditional framed door grilles.

MATERIAL

STANDARD - High quality Australian aluminium

OPTIONAL - High quality Australian steel

CBHG grilles are only available in 34.5mm thickness

FINISH



STANDARD - Natural anodised

OPTIONAL - Coloured anodised or powdercoat

INSTALLATION

CBHG grilles are typically installed at the bottom of timber doors. The threaded rods are embedded securely into the timber. As such other types of doors, like aluminum and steel, must have an additional block of timber or the like to allow install.

DESIGN & DIMENSIONS

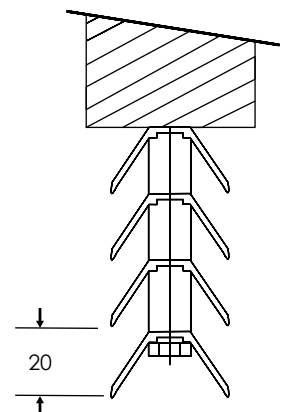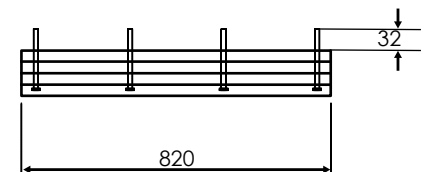

Finished Floor Level

STANDARD SIZES

820 x 83
820 x 103
820 x 123
820 x 143
820 x 163
820 x 183
820 x 203
820 x 223
820 x 243